


9

MultiFreedom Constraints II

Penalty Function Method Physical Interpretation


Recall the example structure

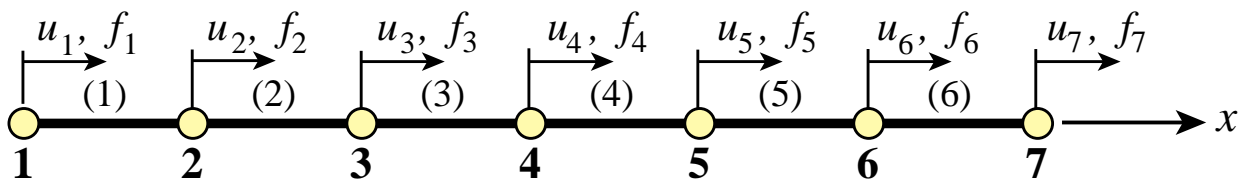

under the homogeneous MFC

$$u_2 = u_6$$

Penalty Function Method (cont'd)

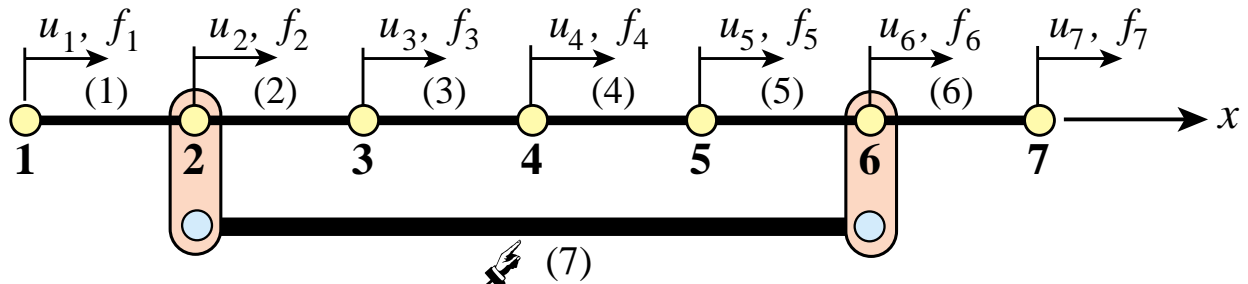

"penalty element" of axial rigidity w

$$w \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix} \begin{bmatrix} u_2 \\ u_6 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \end{bmatrix}$$

w = the "penalty weight" assigned to the constraint


Penalty Function Method (cont'd)

Upon merging the penalty element the modified stiffness equations are

$$\begin{bmatrix}
 K_{11} & K_{12} & 0 & 0 & 0 & 0 & 0 \\
 K_{12} & K_{22} + w & K_{23} & 0 & 0 & -w & 0 \\
 0 & K_{23} & K_{33} & K_{34} & 0 & 0 & 0 \\
 0 & 0 & K_{34} & K_{44} & K_{45} & 0 & 0 \\
 0 & 0 & 0 & K_{45} & K_{55} & K_{56} & 0 \\
 0 & -w & 0 & 0 & K_{56} & K_{66} + w & K_{67} \\
 0 & 0 & 0 & 0 & 0 & K_{67} & K_{77}
 \end{bmatrix}
 \begin{bmatrix}
 u_1 \\
 u_2 \\
 u_3 \\
 u_4 \\
 u_5 \\
 u_6 \\
 u_7
 \end{bmatrix}
 =
 \begin{bmatrix}
 f_1 \\
 f_2 \\
 f_3 \\
 f_4 \\
 f_5 \\
 f_6 \\
 f_7
 \end{bmatrix}$$

This modified system is submitted to the equation solver.
 Note that \mathbf{u} retains the same arrangement of DOFs.

But which penalty weight to use?

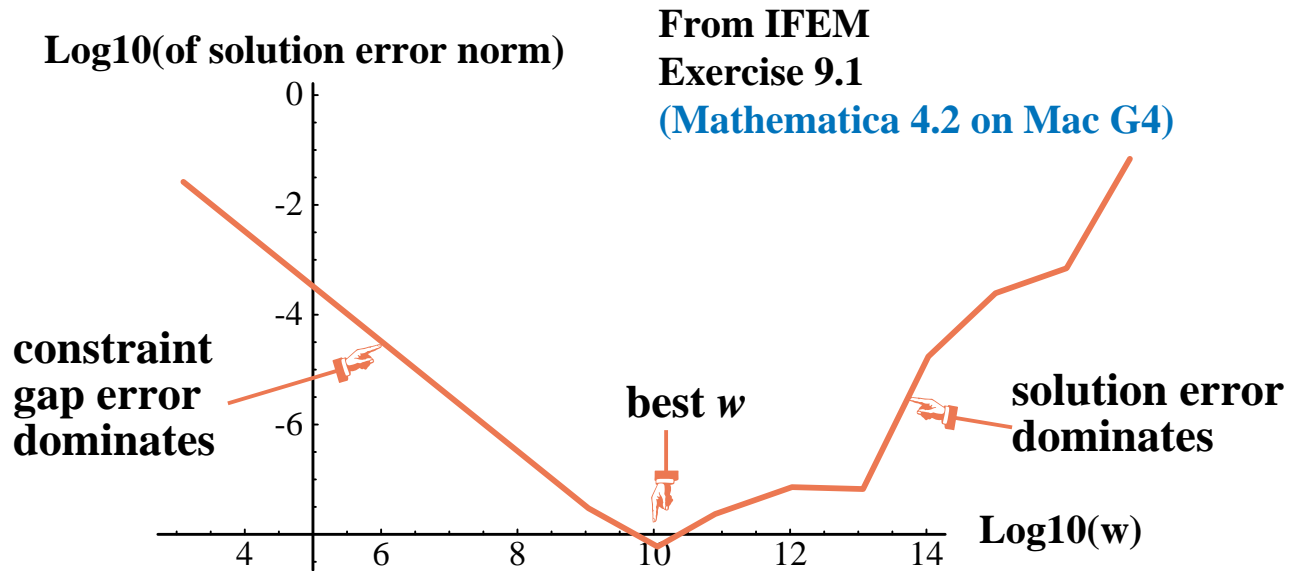

Rough guideline: "square root rule"; see Notes.

Penalty Function Method - General MFCs

$$3u_3 + u_5 - 4u_6 = 1$$

Rewrite as matrix product

$$[3 \quad 1 \quad -4] \begin{bmatrix} u_3 \\ u_5 \\ u_6 \end{bmatrix} = 1$$

Premultiply both sides by $[3 \quad 1 \quad -4]^T$

$$\begin{bmatrix} 9 & 3 & -12 \\ 3 & 1 & -4 \\ -12 & -4 & 16 \end{bmatrix} \begin{bmatrix} u_3 \\ u_5 \\ u_6 \end{bmatrix} = \begin{bmatrix} 3 \\ 1 \\ -4 \end{bmatrix}$$

"Penalty element"
stiffness equations

Scale by w and merge:

$$\begin{bmatrix} K_{11} & K_{12} & 0 & 0 & 0 & 0 & 0 \\ K_{12} & K_{22} & K_{23} & 0 & 0 & 0 & 0 \\ 0 & K_{23} & K_{33} + 9w & K_{34} & 3w & -12w & 0 \\ 0 & 0 & K_{34} & K_{44} & K_{45} & 0 & 0 \\ 0 & 0 & 3w & K_{45} & K_{55} + w & K_{56} - 4w & 0 \\ 0 & 0 & -12w & 0 & K_{56} - 4w & K_{66} + 16w & K_{67} \\ 0 & 0 & 0 & 0 & 0 & K_{67} & K_{77} \end{bmatrix} \begin{bmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \\ u_5 \\ u_6 \\ u_7 \end{bmatrix} = \begin{bmatrix} f_1 \\ f_2 \\ f_3 + 3w \\ f_4 \\ f_5 + w \\ f_6 - 4w \\ f_7 \end{bmatrix}$$

Assessment of Penalty Function Method

ADVANTAGES


general application (inc' nonlinear MFCs)
**easy to implement using FE library and
standard assembler**
no change in vector of unknowns
retains positive definiteness
insensitive to constraint dependence

DISADVANTAGES

selection of weights left to user - big burden
accuracy limited by ill-conditioning

Lagrange Multiplier Method

Physical Interpretation

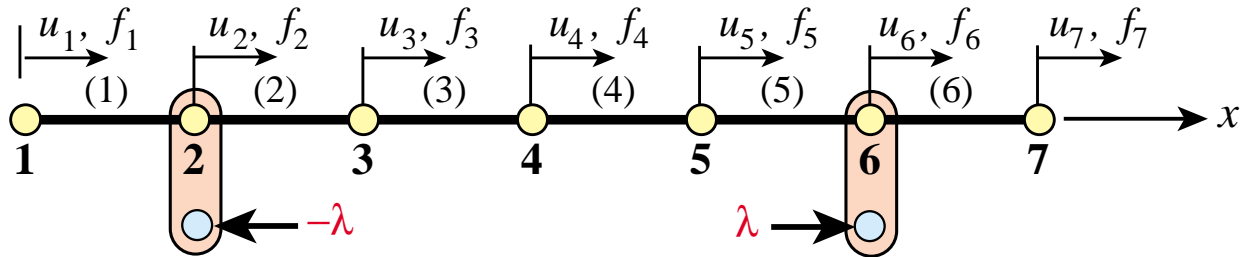

force-pair that enforces MFC

$$\begin{bmatrix}
 K_{11} & K_{12} & 0 & 0 & 0 & 0 & 0 \\
 K_{12} & K_{22} & K_{23} & 0 & 0 & 0 & 0 \\
 0 & K_{23} & K_{33} & K_{34} & 0 & 0 & 0 \\
 0 & 0 & K_{34} & K_{44} & K_{45} & 0 & 0 \\
 0 & 0 & 0 & K_{45} & K_{55} & K_{56} & 0 \\
 0 & 0 & 0 & 0 & K_{56} & K_{66} & K_{67} \\
 0 & 0 & 0 & 0 & 0 & K_{67} & K_{77}
 \end{bmatrix}
 \begin{bmatrix}
 u_1 \\
 u_2 \\
 u_3 \\
 u_4 \\
 u_5 \\
 u_6 \\
 u_7
 \end{bmatrix}
 =
 \begin{bmatrix}
 f_1 \\
 f_2 - \lambda \\
 f_3 \\
 f_4 \\
 f_5 \\
 f_6 + \lambda \\
 f_7
 \end{bmatrix}$$

Lagrange Multiplier Method (cont'd)

Because λ is unknown, it is passed to the LHS and appended to the node-displacement vector:

$$\begin{bmatrix} K_{11} & K_{12} & 0 & 0 & 0 & 0 & 0 & 0 \\ K_{12} & K_{22} & K_{23} & 0 & 0 & 0 & 0 & 1 \\ 0 & K_{23} & K_{33} & K_{34} & 0 & 0 & 0 & 0 \\ 0 & 0 & K_{34} & K_{44} & K_{45} & 0 & 0 & 0 \\ 0 & 0 & 0 & K_{45} & K_{55} & K_{56} & 0 & 0 \\ 0 & 0 & 0 & 0 & K_{56} & K_{66} & K_{67} & -1 \\ 0 & 0 & 0 & 0 & 0 & K_{67} & K_{77} & 0 \end{bmatrix} \begin{bmatrix} u_1 \\ u_2 \\ u_3 \\ u_4 \\ u_5 \\ u_6 \\ u_7 \\ \lambda \end{bmatrix} = \begin{bmatrix} f_1 \\ f_2 \\ f_3 \\ f_4 \\ f_5 \\ f_6 \\ f_7 \end{bmatrix}$$

**This is now a system of 7 equations and 8 unknowns.
Need an extra equation: the MFC.**

Lagrange Multiplier Method (cont'd)

Append MFC as additional equation:

$$\begin{bmatrix}
 K_{11} & K_{12} & 0 & 0 & 0 & 0 & 0 & 0 \\
 K_{12} & K_{22} & K_{23} & 0 & 0 & 0 & 0 & 1 \\
 0 & K_{23} & K_{33} & K_{34} & 0 & 0 & 0 & 0 \\
 0 & 0 & K_{34} & K_{44} & K_{45} & 0 & 0 & 0 \\
 0 & 0 & 0 & K_{45} & K_{55} & K_{56} & 0 & 0 \\
 0 & 0 & 0 & 0 & K_{56} & K_{66} & K_{67} & -1 \\
 0 & 0 & 0 & 0 & 0 & K_{67} & K_{77} & 0 \\
 0 & 1 & 0 & 0 & 0 & -1 & 0 & 0
 \end{bmatrix}
 \begin{bmatrix}
 u_1 \\
 u_2 \\
 u_3 \\
 u_4 \\
 u_5 \\
 u_6 \\
 u_7 \\
 \lambda
 \end{bmatrix}
 =
 \begin{bmatrix}
 f_1 \\
 f_2 \\
 f_3 \\
 f_4 \\
 f_5 \\
 f_6 \\
 f_7 \\
 0
 \end{bmatrix}$$

This is the *multiplier-augmented system*. The new coefficient matrix is called the *bordered stiffness*.

Lagrange Multiplier Method - Multiple MFCs

Three MFCs: $u_2 - u_6 = 0, \quad 5u_2 - 8u_7 = 3, \quad 3u_3 + u_5 - 4u_6 = 1$

Recipe step #1:
append the 3 constraints

$$\begin{bmatrix}
 K_{11} & K_{12} & 0 & 0 & 0 & 0 & 0 \\
 K_{12} & K_{22} & K_{23} & 0 & 0 & 0 & 0 \\
 0 & K_{23} & K_{33} & K_{34} & 0 & 0 & 0 \\
 0 & 0 & K_{34} & K_{44} & K_{45} & 0 & 0 \\
 0 & 0 & 0 & K_{45} & K_{55} & K_{56} & 0 \\
 0 & 0 & 0 & 0 & K_{56} & K_{66} & K_{67} \\
 0 & 0 & 0 & 0 & 0 & K_{67} & K_{77} \\
 0 & 1 & 0 & 0 & 0 & -1 & 0 \\
 0 & 5 & 0 & 0 & 0 & 0 & -8 \\
 0 & 0 & 3 & 0 & 1 & -4 & 0
 \end{bmatrix}
 \begin{bmatrix}
 u_1 \\
 u_2 \\
 u_3 \\
 u_4 \\
 u_5 \\
 u_6 \\
 u_7
 \end{bmatrix}
 =
 \begin{bmatrix}
 f_1 \\
 f_2 \\
 f_3 \\
 f_4 \\
 f_5 \\
 f_6 \\
 f_7 \\
 0 \\
 3 \\
 1
 \end{bmatrix}$$

Lagrange Multiplier Method - Multiple MFCs (cont'd)

**Recipe step #2: append multipliers,
symmetrize & fill**

$$\begin{bmatrix}
 K_{11} & K_{12} & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
 K_{12} & K_{22} & K_{23} & 0 & 0 & 0 & 0 & 1 & 5 & 0 \\
 0 & K_{23} & K_{33} & K_{34} & 0 & 0 & 0 & 0 & 0 & 3 \\
 0 & 0 & K_{34} & K_{44} & K_{45} & 0 & 0 & 0 & 0 & 0 \\
 0 & 0 & 0 & K_{45} & K_{55} & K_{56} & 0 & 0 & 0 & 1 \\
 0 & 0 & 0 & 0 & K_{56} & K_{66} & K_{67} & -1 & 0 & -4 \\
 0 & 0 & 0 & 0 & 0 & K_{67} & K_{77} & 0 & -8 & 0 \\
 0 & 1 & 0 & 0 & 0 & -1 & 0 & 0 & 0 & 0 \\
 0 & 5 & 0 & 0 & 0 & 0 & -8 & 0 & 0 & 0 \\
 0 & 0 & 3 & 0 & 1 & -4 & 0 & 0 & 0 & 0
 \end{bmatrix}
 \begin{bmatrix}
 u_1 \\
 u_2 \\
 u_3 \\
 u_4 \\
 u_5 \\
 u_6 \\
 u_7 \\
 \lambda_1 \\
 \lambda_2 \\
 \lambda_3
 \end{bmatrix}
 =
 \begin{bmatrix}
 f_1 \\
 f_2 \\
 f_3 \\
 f_4 \\
 f_5 \\
 f_6 \\
 f_7 \\
 0 \\
 3 \\
 1
 \end{bmatrix}$$

Assessment of Lagrange Multiplier Method



ADVANTAGES

general application

exact

no user decisions ("black box")



DISADVANTAGES

difficult implementation

additional unknowns

loses positive definiteness

sensitive to constraint dependence

MFC Application Methods: Assessment Summary

Introduction to FEM

	Master-Slave Elimination	Penalty Function	Lagrange Multiplier
Generality	fair	excellent	excellent
Ease of implementation	poor to fair	good	fair
Sensitivity to user decisions	high	high	small to none
Accuracy	variable	mediocre	excellent
Sensitivity as regards constraint dependence	high	none	high
Retains positive definiteness	yes	yes	no
Modifies unknown vector	yes	no	yes